




SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001

Electronic Measuring Instruments 

Measure Sheet/Film/Plate Products/Materials Antistatic Flooring Just As They Are

Quality Control by Surface/Volume Resistance Measurements



- Measurement voltage up to 1,000 V enables stable resistance measurements of materials and their characteristics when high voltage is applied
- Electrodes compliant with the JIS C 2170 and IEC 61340-2-3 standards
- Surface and volume resistance of sheets and films can be measured just as they are without the need to cut samples
- Measure the surface resistance of antistatic flooring and molded products

Easy Measurement

- Sheets and molded products can be measured just as they are. Samples for which the size is specified beforehand do not need to be prepared.
- Resistance of thick samples can be measured.
- **Just place** the main body on the antistatic flooring or resin **to measure the stable surface resistance.**

Reliable Measurement

- **Standards compliance**
JIS C 2170 and IEC61340-2-3
“Methods of test for determining the resistance and resistivity of solid planar materials used to avoid electrostatic charge accumulation”
- **Stable measurement**
High voltage (up to 1,000 V)
Stable contact under load
- **Test fixture (option)**


Up to 10¹³ Ω (10 TΩ) High Resistance Measurement at 1,000 V

- When used in combination with the **DSM-8104** or **SM-8220** super megohm meter
Measurement resistance range*:
10³ to 10¹³ Ω
(*When using the SM-8220: 5 × 10⁴ to 10¹³ Ω)
- **Surface resistance** can be measured with the main body alone
- **Volume resistance** can be measured using a pair electrode

Simple and Convenient Surface/Volume Resistance Measurement


Surface Resistance Measurement

Measure the surface resistance between the main electrode and ring electrode of the main body electrode.

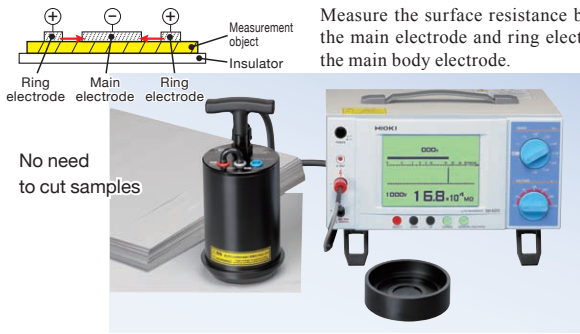

No need to cut samples

Electrode Shapes Compliant with Standards

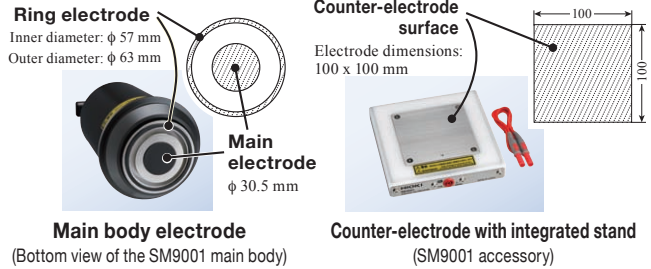

Main body electrode
(Bottom view of the SM9001 main body)

Counter-electrode with integrated stand
(SM9001 accessory)

The electrode on the main body uses conductive rubber in a size conforming to standards. Just place the electrode on the sample or measurement point and stable measurements can be made under a load of 2.5 kg. Furthermore, measurement voltage up to 1,000 V enables highly accurate measurements.

Volume Resistance Measurement

Measure the volume resistance of the sample sandwiched between the main electrode and counter-electrode.



No need to cut samples

Test Before Use With the SM9002 Verification Fixture for Surface Resistance Measurement (Option)

The SM9002 Verification Fixture for Surface Resistance Measurement (option) allows you to check the operation of the electrode to increase the reliability of measurement results.

VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT SM9002



When using the SM9002

Specifications (One Year Product Warranty and One Year Accuracy Warranty)

Surface/Volume Resistance Measurement Electrode SM9001 Specifications	
Reference standards	IEC61340-2-3: 2000 and JIS C2170: 2004
Resistance measurement	Surface/volume resistance measurement (switch using connection terminals)
Measurement range	1 × 10 ³ Ω* to 1 × 10 ¹³ Ω * The minimum resistance measurement range varies depending on the specification of the super megohm meter. (Reference) When using the SM-8220: 5 × 10 ⁴ Ω (50 kΩ) to 1 × 10 ¹³ Ω (10 TΩ). When using the DSM-8104 or DSM-8542: 1 × 10 ³ Ω (1 kΩ) to 1 × 10 ¹³ Ω (10 TΩ)
Resistance between electrodes	1 × 10 ¹⁴ Ω or more
External dimensions	Approx. φ100 × 233H mm (φ3.94" × 8.78"H) (including the handle and barrier, but not including the support holder), connection cable length: 1 m
Weight	2.5 ± 0.25 kg (88.2 ± 8.82 oz.)
Electrode	Conductive rubber with a thickness of 3 mm Main electrode diameter: φ30.5 mm Ring electrode diameters: φ57 mm (ID), φ63 mm (OD)
Counter-electrode with integrated support plate	Electrode dimensions: 100 × 100 mm External dimensions: Approx. 154W × 155D × 25H mm (6.06"W × 6.10"D × 0.98"H) Weight: Approx. 1.2 kg (42.3 oz.)
Operating temperature/humidity range	0°C to 40°C (32°F to 104°F)/80% RH or less (no condensation)
Storage temperature/humidity range	-10°C to 50°C (14°F to 122°F)/80% RH or less (no condensation)
Installation site	Indoors, pollution degree 2, altitude 2,000 m (6562 feet) or less
Rated ground voltage	Max. 1,000 V DC

Withstand voltage	7,504 V DC between input terminal (batch) and main body case
Applicable models	Ultra Super Megohm meter SM-8220 Digital Ultra Insulation/Micro Ammeter DSM-8104/DSM-8542 (When using a super megohm meter other than the above, measurements are possible within the measurement range of the corresponding super megohm meter. With the SM-8213, 8215, and 8216 super megohm meters, high resistance measurements of the SM9002 are out of the accuracy range of the super megohm meter. The SM-8215 super megohm meter does not support the low resistance measurement of the SM9002.)
Accessories	Counter-electrode with integrated stand × 1, protective stand × 1, short bar × 1, counter-electrode connection cable (approx. 0.7 m) × 1, carrying case × 1

Verification Fixture for Surface Resistance Measurement SM9002 Specifications	
Low resistance	500 kΩ ± 1%, measurement voltage 10 V DC
High resistance	1 TΩ ± 5%, measurement voltage 100 V DC
Operating temperature/humidity range	18°C to 28°C (64.4°F to 104°F)/60% RH or less (no condensation)
Storage temperature/humidity range	-10°C to 50°C (14°F to 122°F)/80% RH or less (no condensation)
Installation site	Indoors, pollution degree 2, altitude 2,000 m (6562 feet) or less
Rated ground voltage	Max. 100 V DC
Withstand voltage	1,120 V DC between electrode (batch) and main body case
Applicable model	Surface/Volume Resistance Measurement Electrode SM9001
External dimensions	Approx. φ100 × 56H mm (φ3.94" × 2.20"H)
Weight	Approx. 300 g (10.6 oz.)

Ordering Information

Main body

SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001



SM9001

Counter-electrode with integrated stand (included)

Protective stand (included)

Carrying case (included)

Option

VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT SM9002

(With integrated low resistance [500 kΩ]/high resistance [1 TΩ] test surfaces*)



* The low resistance and high resistance test surfaces are arranged inside a single fixture.

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

Headquarters :

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 / FAX +81-268-28-0568
http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :

6 Corporate Drive, Cranbury, NJ 08512 USA
TEL +1-609-409-9109 / FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :
1608-1610, Shanghai Times Square Office, 93 Huai Hai Zhong Road
Shanghai, P.R.China POSTCODE: 200021
TEL +86-21-63910090/63910092 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn
Beijing Office : TEL +86-10-84418761 / 84418762
Guangzhou Office : TEL +86-20-38392673 / 38392676
HIOKI INDIA PRIVATE LIMITED :
Khandela House, 24 Gulmohar Colony Indore 452 018 (M.P.), India
TEL +91-731-4223901, 4223902 FAX +91-731-4223903
http://www.hioki.in / E-mail: info@hioki.in
HIOKI SINGAPORE PTE. LTD. :
33 Ubi Avenue 3, #03-02 Vertex, Singapore 408868
TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info@hioki.com.sg

DISTRIBUTED BY